

LLBG AD 2.1 AERODROME LOCATION INDICATOR AND NAME

LLBG – TEL-AVIV/BEN-GURION

LLBG AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	<i>ARP coordinates and site at AD</i>	320034N 0345308E 316°/1 400 M from THR 30
2	<i>Direction and distance from city</i>	115°, 19 km from Tel-Aviv city center
3	<i>Elevation/Reference temperature</i>	134 ft/31.9°C (August)
4	<i>Geoid undulation at AD ELEV PSN</i>	19 M
5	<i>MAG VAR/Annual change</i>	5°E (2019)/0.08° increasing
6	<i>AD administration, address, telephone, telefax, telex, AFS</i>	Israel Airports Authority (IAA) Ben-Gurion Airport P.O.Box 7, Ben-Gurion International Airport 7015001 Tel: 972-3-9752000/1/2 Telefax: 972-3-9752010 Telex: NIL AIS Tel: 972-3-9756215/6/7 AIS Telefax: 972-3-9756219 AFS: LLBGYDYX
7	<i>Types of traffic permitted (IFR/VFR)</i>	IFR/CVFR
8	<i>Remarks</i>	See LLBG AD 2.22 FLIGHT PROCEDURES, para 10

LLBG AD 2.3 OPERATIONAL HOURS

1	<i>AD administration</i>	H24
2	<i>Customs and immigration</i>	H24
3	<i>Health and sanitation</i>	H24
4	<i>AIS briefing office</i>	H24
5	<i>ATS Reporting Office (ARO)</i>	H24
6	<i>MET briefing office</i>	H24
7	<i>ATS</i>	H24
8	<i>Fuelling</i>	H24
9	<i>Handling</i>	H24
10	<i>Security</i>	H24
11	<i>De-icing</i>	Nil
12	<i>Remarks</i>	See LLBG AD 2.22 FLIGHT PROCEDURES, para 10

LLBG AD 2.4 HANDLING SERVICE AND FACILITIES

1	<i>Cargo-handling facilities</i>	Trucks 2.5-3.5 tonnes. Up to 5 tonnes handling possible
2	<i>Fuel/oil types</i>	Jet A-1 & 100LL, oil, all types normally available.
3	<i>Fuelling facilities/capacity</i>	Fueling Dept: Tel: 972-3-9751354, 972-3-9774046, Mobile: 972-57-7263440, Fax: 972-3-9751392 Jet A-1 available through hydrants for all parking stands on aprons 'B', 'J' & 'L' and all parking stands on terminal 3 aprons. Refueling on parking stand J3 through Left wing only. Refueling through bowsers as required.
4	<i>De-icing facilities</i>	Nil
5	<i>Hangar space for visiting aircraft</i>	Available by prior coordination with:
6	<i>Repair facilities for visiting aircraft</i>	1) IAA/BEDEK Division Tel: 972-3-9353822 Fax: 972-3-9357222 2) EL-AL Israel Airlines LTD. Tel: 972-3-9714006, Fax: 972-3-9714009 Telex: 381052 H TKGK IL
7	<i>Remarks</i>	Nil

LLBG AD 2.5 PASSENGER FACILITIES

1	<i>Hotels</i>	In Tel-Aviv city.
2	<i>Restaurants</i>	At AD and in Tel-Aviv city.
3	<i>Transportation</i>	Buses, taxis, train and car hire from the AD.
4	<i>Medical facilities</i>	First aid & ambulance at AD, hospitals in the vicinity of AD.
5	<i>Bank and post office</i>	At AD open within AD HR.
6	<i>Tourist office</i>	At AD and in Tel-Aviv city.
7	<i>Remarks</i>	NIL

LLBG AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	<i>AD category for fire fighting</i>	Within AD HR: CAT 9
2	<i>Rescue equipment</i>	Yes, ambulances
3	<i>Capability for removal of disabled aircraft</i>	IAA & ELAL Israel airline have common regulation for aircraft recovery. Hydraulic jacks available with MTOM up to 20 000 KG. For aircraft with a higher MTOM, IATA pool arrangement is available. Contacts numbers: El Al aircraft Maintenance Division: +972-3-9714590, Ben-Gurion Airport Operations Center: +972-3-9756242, IAA Head ground operation manager: +972-50-9752243.
4	<i>Remarks</i>	Outside AD HR, fire fighting and ambulances to be requested if the situation needs.


LLBG AD 2.7 SEASONAL AVAILABILITY - CLEARING

NA

LLBG AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	<i>Apron surface and strength</i>	Surface: Concrete/Asphalt (A, B, J, L, V, Terminal 3 EH & WH) Concrete (Terminal 3 concourses B, C, D, E) Strength: H – PCN 75/R/B/W/T; X – PCN 75/R/B/W/T EH – PCN 77/R/C/X/T; WH – PCN 77/R/C/X/T; T3 – concourse B Left – PCN 66/R/C/X/T; T3 – concourse B.Head – PCN 76/R/C/X/T; T3 – concourse B.Right – PCN 67/R/C/X/T; T3 – concourse C.Left – PCN 67/R/C/X/T; T3 – concourse C.Head – PCN 76/R/C/X/T; T3 – concourse C.Right – PCN 68/R/C/X/T T3 – concourse D.Left – PCN 54/R/C/X/T; T3 – concourse D.Head – PCN 72/R/C/X/T; T3 – concourse D.Right – PCN 67/R/C/X/T; T3 – concourse E.Left – PCN 65/R/B/W/T; T3 – concourse E.Head – PCN 98/R/B/W/T; T3 – concourse E.Right – PCN 65/R/B/W/T J – 77/F/C/X/U AND 77/R/C/X/U; L – 77/F/C/X/U AND 77/R/C/X/U; BE – 60/F/C/Y/U AND 60/R/C/Y/U; V – 95/F/C/X/T Q – 34/F/C/X/U
2	<i>Taxiway width, surface and strength</i>	Width: 23 - 45 M Surface: Asphalt (F, J, K, M, Y, Z, W1, W2, W3, W4, S, L, N, R, E) Strength: K, M, Y, L, E, R, N – PCN 90/F/C/W/T; N – between L AND K – PCN 81/F/C/Y/T; L – between K and Apron L – PCN 74/R/C/X/T; F – PCN 75/F/C/X/T; Z – PCN 89/F/C/X/T; W1, W2, W3, W4, S, E1, E2, E3, E4, E5, T1, T2, T3, T4 – PCN 90/F/C/W/T
3	<i>ACL location and elevation</i>	Location: at apron Elevation: See the appropriate Aircraft Parking Chart
4	<i>VOR checkpoints</i>	VOR: see the aerodrome chart
5	<i>INS checkpoints</i>	INS: see the aircraft parking charts
6	<i>Remarks</i>	NIL

LLBG AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	<i>Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stand.</i>	Taxiing guidance signs at all intersections with TWY and RWY and at all holding positions. Guide lines at apron. Nose-in guidance at aircraft stands.
2	<i>RWY and TWY markings and LGT</i>	RWY: Designation, THR, TDZ centre line, edge runway end as appropriate, marked and lighted TWY: Centre line, holding positions at all TWY/RWY intersections, marked and lighted.
3	<i>Stop bars</i>	TWY L, 90 M North and 75 M South of THR CL RWY 30. Stop Bar 08-26: On TWYs - S, K, W4, W3, W2, W1, E, E1 Stop Bar 12-30: On TWYs – K, W4 (SWN & SWS), R (SRN & SRS), E(SEN&SES), F, L (SLN & SLS) Stop Bar 03-21: On TWYs – E1, E2, N (SNW & SNE), K (SKY & SKW & SKE SKF), M (SMW & SME), E4, E5, T1, T2, T3, T4. Stop Bar designation: White markings on a blue background sign. The designation consists of the letter S followed by TXY designation on which the SB is positioned. For example: 
4	<i>Remarks</i>	See also LLBG AD 2.20 for taxiing to and from stands.

LLBG AD 2.10 AERODROME OBSTACLES

In Area 2					
OBST ID/ Designation	OBST type	OBST position	ELEV/HGT	Markings/ Type, colour	Remarks
a	b	c	d	e	f
Pole at 12 / APCH	Power Lines	TBD	197 ft	TBD	Approximate position – 1550 meters west from runway 12 THR
In Area 3					
OBST ID/ Designation	OBST type	OBST position	ELEV/HGT	Markings/ Type, colour	Remarks
a	b	c	d	e	f
TBD	TBD	TBD	TBD	TBD	TBD

LLBG AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET office	Israel Meteorological Service Bet Dagan (LLBD)
2	Hours of service MET office outside hours	H24 –
3	Office responsible for TAF preparation Periods of validity	Israel Meteorological Service, Bet Dagan (LLBD) 24 HR (Long TAF)
4	Type of landing forecast Interval of issuance	Trend 2 HR
5	Briefing/consultation provided	Telephone and/or a video conference briefing with the Meteorological Watch Office at Israel Meteorological Service, Bet Dagan, can be established in the aerodrome meteorological station
6	Flight documentation Language(s) used	Charts, OPMET information, SIGMET, Aerodrome Warnings and low level forecasts for TEL-AVIV FIR available in ICAO abbreviated plain language text or in English
7	Charts and other information available for briefing or consulting	Low level and upper wind and temperature chart for standard isobaric surface. Significant weather charts (low level, medium and high level)
8	Supplementary equipment available for providing information	Meteorological information terminal available at the AD meteorological station containing: weather radar, weather satellite image display and animation, Upper Air temperature & wind profiles derived from Israeli radiosonds and AMDAR reports, SIGWX and T+W charts and updated OPMET information
9	ATS units provided with information	Ben-Gurion TWR Ben-Gurion APP
10	Additional information (limitation of service, etc.)	See AD chart transmissiometers location

LLBG AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (m)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
03	028.98°	2 772 X 60	90/F/C/W/T Asphalt	THR 315946.38N 0345309.89E; RWY END 320105.25N 0345400.81E; GUND 19.0 m	THR 134.31 ft TDZ - 134.38 ft	-0.73%520 m; 0%90 m; +0.27%960 m; 0%50 m; -0.1%350 m; 0%30 m; +0.18%770 m
21	208.98°	2 772 X 60	90/F/C/W/T Asphalt	THR 320105.25N 0345400.81E; RWY END 315946.38N 0345309.89E; GUND 19.0 m	THR 134.02 ft TDZ - 133.98 ft	-0.18%770 m; 0%30 m; +0.1%350 m; 0%50 m; -0.27%960 m; 0%90 m; +0.73%520 m

08	080.00°	4 062 X 45	90/F/C/X/T Asphalt	THR 320046.29N 0345139.14E; RWY END 320106.82N 0345353.47E; GUND 19.0 m	THR 96.78 ft TDZ - 108.62 ft	-0.35%/-0.45% (462 m) (3 600 m)
26	260.00°	4 062 X 45	90/F/C/X/T Asphalt	THR 320103.83N 0345333.88E; RWY END 320043.97N 0345124.02E; GUND 19.0 m	THR 124.31 ft TDZ - 124.31 ft	+0.45%/+0.35% (3 600 m) (462 m)
12	121.40°	3 112 X 45	90/F/C/W/T Asphalt	THR 320051.14N 0345200.56E; RWY END 315958.21N 0345342.31E; GUND 19.0 m	THR 102.36 ft TDZ - 111.54 ft	+0.25%/+0.3% (2 581 m) (531 m)
30	301.40°	3 112 X 45	90/F/C/W/T Asphalt	THR 315959.88N 0345339.12E; RWY END 320051.14N 0345200.56E GUND 19.0 m	THR 129.85 ft TDZ - 129.85 ft	-0.3%/-0.25% (531 m) (2 581 m)
<i>SWY dimensions (m)</i>	<i>CWY dimensions (m)</i>	<i>Strip dimensions (m)</i>	<i>Dimensions of RESA (m)</i>	<i>Location and description of arresting system</i>	<i>OFZ</i>	<i>Remarks</i>
8	9	10	11	12	13	14
Nil	150 X 150	2 892 X 300	RESA RWY 03 – 232 X 120	Nil	Available	Nil
Nil	150 X 150	2 892 X 300	RESA RWY 21 – 218 X 120	Nil	Available	Nil
400 X 90	520 X 150	4 182 X 300	RESA RWY 08 – 255 X 90	Nil	Available	RESA + SWY + CWY ARE PART OF THE RWY
Nil	150 X 150	4 182 X 300	RESA RWY 26 – 240 X 90	Nil	Available	Nil
60 X 90	150 X 150	3 292 X 300	RESA RWY 12 – 101 X 90	Nil	Available	Nil
Nil	150 X 150	3 292 X 300	RESA RWY 30 – 240 X 90	Nil	Available	Nil

LLBG AD 2.13 DECLARED DISTANCES

<i>RWY designator</i>	<i>TORA (m)</i>	<i>TODA (m)</i>	<i>ASDA (m)</i>	<i>LDA (m)</i>	<i>Remarks</i>
1	2	3	4	5	6
03	2 772	2 922	2 772	2 772	Nil
21	2 772	2 922	2 772	2 772	Nil
21 – E2/T2	-	-	-	1 084	Distance from THR 21 to TXY E2/T2
21 – N	-	-	-	1 750	Distance from THR 21 to TXY N
21 – E3/T3	-	-	-	2 014	Distance from THR 21 to TXY E3/T3
21 – K	-	-	-	2 228	Distance from THR 21 to TXY K
21 – M	-	-	-	2 308	Distance from THR 21 to TXY M
21 – E4	-	-	-	2 360	Distance from THR 21 to TXY E4
08	3 600	4 120	4 000	3 580	TORA 08 for Noise Abate- ment Departure Procedure. RESA is part of the RWY
26	4 062	4 212	4 062	3 462	Nil
26 – W4	-	-	-	1 960	Distance from THR 26 to TXY W4

26 – K	-	-	-	2 584	Distance from THR 26 to TXY K
12	3 112	3 262	3 172	3 112	Nil
12 – Y	-	-	-	1 933	Distance from THR 12 to TXY Y
12 – F	-	-	-	2 720	Distance from THR 12 to TXY F
12 – L	-	-	-	3 100	Distance from THR 12 to TXY L
30	3 112	3 262	3 112	3 032	Nil
30 – R	-	-	-	1 553	Distance from THR 30 to TXY R
30 – Z	-	-	-	2 264	Distance from THR 30 to TXY Z
30 – W4	-	-	-	2 614	Distance from THR 30 to TXY W4

LLBG AD 2.13A DECLARED REMAINING DISTANCES

<i>RWY – RWY/TWY Intersection</i>	<i>RWY designator</i>	<i>TORA (M)</i>	<i>TODA (M)</i>	<i>ASDA (M)</i>	<i>Remarks</i>
08 – 12	08	2 566	3 086	2 966	For purpose of Noise Restrictions by ATC
08 – K	08	2 736	3 256	3 136	For purpose of Noise Restrictions by ATC
26 – E	26	3 985	4 135	3 985	Nil
26 – W1	26	3 424	3 574	3 424	Nil
26 – W2	26	3 322	3 472	3 322	Nil
12 – Z	12	2 340	2 490	2 400	Nil
12 – W4	12	2 686	2 836	2 746	Nil
30 – F	30	2 642	2 792	2 642	Nil
30 – Y	30	2 077	2 227	2 077	Nil

LLBG AD 2.14 APPROACH AND RUNWAY LIGHTING

<i>RWY Designator</i>	<i>APCH LGT type LEN INTST</i>	<i>THR LGT colour, WBAR</i>	<i>PAPI (MEHT)</i>	<i>TDZ, LGT LEN</i>	<i>RWY Centre Line LGT Length, spacing, colour, INTST</i>	<i>RWY edge LGT LEN, spacing colour INTST</i>	<i>RWY End LGT colour</i>	<i>SWY LGT LEN (M) colour</i>	<i>Remarks</i>
1	2	3	4	5	6	7	8	9	10
03	Nil	Nil	Nil	Nil	RCL - CAT II (Threshold-End) LGTD 2 772m; 1 872m - white; FM 1 872m to 2 472m - Alternate red/white; FM 2 472m to 2 772m - red; Distance between lights - 30m; Interlined circuit; Light intensity - High	REL (Threshold-End) LGTD 2 772m; 2 172m - white; FM 2 172m to 2 772m - yellow; Distance between lights - 60m; Interlined circuit; Light intensity - High	Type - CAT II Figure 5.3.11.2 Color - RED; Distance between lights - 6m; Interlined circuit	Nil	Nil
21	APCH LGT Type - CAT II Barrette LGT- 900m; Color - center line	THR+ WBAR Type - CAT-2 Figure	PAPI Right& left 3° MEHT-	TDZ CAT-2 LGT- 900m Color –	RCL - CAT II (Threshold-End) LGTD 2 772m; 1 872m - White; FM 1 872m to	REL (Threshold-End) LGTD 2 772m; 2 172m - White; FM 2 172m to	Type - CAT II Figure 5.3.11.2 Color-	Nil	Nil

	barrette - white; Color - Side row barrette - red; Crossbar's 146m & 290m from THR; distance between barrette - approximately 30m (approved installation tolerance of up to 2 m); RAIL (SFL - 900m from THR to 300m from THR); REIL Interlined circuit; Light intensity - High	5.3.10.8 Color- green; Distance between light- 1.5m Interlined circuit	20.64m Inter- lined circuit	white; Interlined circuit	2 472m - Alter- nate red/white; FM 2 472m to 2 772m - red; Distance between lights - 30m; Interlined circuit; Light intensity - High	2 772 - Yellow; Distance between lights - 60m; Interlined circuit; Light intensity - High	RED; Distance between lights - 6m; Interlined circuit		
08	APCH LGT Type - SALS Barrette LGT- 420m; Color - center line barrette - white; Crossbar 300m from THR; distance between barrette - approximately 60m; REIL OMNI; Light intensity - High	Green	PAPI Left 3° MEHT- 20.32m	Nil	LGTD 4 062 m (Threshold-End); 3 162m - White; FM 3 162m to 3 762m - Alternate RED/WHITE; FM 3 762m - RED; Distance between lights - 30m; Light intensity - High	REL (Threshold-End) LGTD 4 062 m; FM 08 to THR (403m) - RED; FM THR to 3 550m - WHITE; FM 3 550m - YELLOW; Distance between lights - 50m; Light intensity - High	Red	Nil	Nil
26	APCH LGT Type - CAT II Barrette LGT- 905m; Color - center line barrette - white; Color - Side row barrette - red; Crossbar's 150m & 300m from THR; distance between barrette - approximately 30m (approved installation tolerance of up to 2 m); REIL OMNI; Light intensity - High	Green	PAPI Right & Left/3° MEHT 19.92m	900 M	LGTD 4 062 m (Threshold-End); 3 162m - White; FM 3 162m to 3 762m - Alternate RED/WHITE; FM 3 762m - RED; Distance between lights - 30m; Light intensity - High	REL (Threshold-End) LGTD 4 062 m; FM 26 to THR (600m) - RED; FM THR to 3 462m - WHITE; FM 3 462m - YELLOW; Distance between lights - 50m; Light intensity - High	Red	Nil	Nil
12	APCH LGT Type - CAT II Barrette LGT- 916m; Color - center line barrette - white; Color - Side row barrette - red; Crossbar's 154m & 306m from THR; distance between barrette -	Green	PAPI Right & Left/3.0 ° MEHT- 19.81m	Nil	LGTD 3 112 m; (Threshold-End) 2 220m - White; FM 2 220m to 2 820m - Alternate RED/WHITE; FM 2 820m - RED; Distance between lights - 30m; Light intensity - High	REL (Threshold-End) LGTD 3 112m; FM 12 To 2 520m - WHITE; FM 2 520m - YELLOW; Distance between lights - 50m; Light intensity - High	Red	Nil	Nil

	approximately 30m (approved installation tolerance of up to 6 m); Light intensity - High								
30	APCH LGT Type - CAT I Barrette LGT- 720m; Color - center line barrette - white; Crossbar 300m from THR distance between barrette - approximately 30m; REIL OMNI; Light intensity - High	Green	PAPI Right/3. 2° MEHT- 20.36m		LGTD 3 112 m (Threshold-End); 2 220m - White; FM 2 220m to 2 820m - Alternate RED/WHITE; FM 2 820m - RED; Distance between lights - 30m; Light intensity - High	REL (Threshold-End) LGTD 3 112 M; FM 12 To 2 520m - WHITE; FM 2 520m - YELLOW; Distance between lights - 50m; Light intensity - High	Red	Nil	CAT I LGT with only 720 m of barrettes

LLBG AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	<i>ABN/IBN location, characteristics and hours of operation</i>	ABN: At tower building, FLG green/white in IMC and at night
2	<i>LDI location and LGT ANEMOMETER location and LGT</i>	LDI: Nil Anemometer: see AD chart
3	<i>TWY edge and centre line lighting</i>	Edge: All TWY Centre line: TWY K, L, N, S, R & W (green) intersections of RWYs 08/12 & 21/26 (in turns only) and TWY L
4	<i>Secondary power supply/switch-over time</i>	Secondary power supply to all lighting at AD. Switch-over time: 1 SEC.
5	<i>Remarks</i>	Nil

LLBG AD 2.16 HELICOPTER LANDING AREA

Not available.

LLBG AD 2.17 ATS AIRSPACE

1a	<i>Designation and lateral limits</i>	Ben-Gurion CTR 320622N 344626E – 320600N 345051E – 320618N 345332E – 320453N 350008E – 315510N 345912E – 314953N 350147E – 315459N 345257E – 315601N 344201E
2a	<i>Vertical limits</i>	SFC to 2 000 FT MSL
1b	<i>Designation and lateral limits</i>	Ben-Gurion TMA (See ENR 2.1-1)
2b	<i>Vertical limits</i>	(See ENR 2.1-1)
3	<i>Airspace classification</i>	See ENR 1.4
4	<i>ATS unit call sign Language(s)</i>	Ben-Gurion Tower/Approach/ TMA English (See GEN. 3.4-2)
5	<i>Transition altitude</i>	See ENR 1.7-1
6	<i>Remarks</i>	Nil

LLBG AD 2.18 ATS COMMUNICATION FACILITIES

<i>Service Designation</i>	<i>Call Sign</i>	<i>Channel</i>	<i>Hours of Operation</i>	<i>Remarks</i>
1	2	3	4	5
APP	Ben-Gurion Approach / <u>Departure</u> Ben-Gurion Arrival	120.500 131.100	H24 When landing RWY 21	Primary freq. Departure freq.
TWR	Ben-Gurion Tower/ Tower Departure Ben-Gurion Tower Arrival	134.600 132.100	H24 When landing RWY 21	Primary freq.
TMA	Ben-Gurion TMA	119.500	H24	Primary freq.
ATIS (INF)	Ben-Gurion Arrival Information	132.500	H24	ATIS info available: by dialing 972-3- 7755074
ATIS (INF)	Ben-Gurion Departure Information	132.800	H24	by dialing 972-3-7526243 Digital ATIS available via ACARS.
GND EAST	Ben-Gurion Ground (East)	129.200	H24	East of RWY 21
GND WEST	Ben-Gurion Ground (West)	118.050	H24	West of RWY 21
CPT	Ben-Gurion Clearance	As published by ATIS	H24	DCL available
VOLMET		126.800		VOLMET info available by dialing 972-3-9730699
EMERGENCY		121.500	H24	
SECONDARY	Ben-Gurion	119.350		As published by ATIS

LLBG AD 2.19 RADIO NAVIGATION AND LANDING AIDS

<i>Type of aid, MAG VAR Type of supported OPS</i>	<i>ID</i>	<i>Frequency</i>	<i>Hours of operation</i>	<i>Position of transmitting antenna coordinates</i>	<i>Elevation of DME transmitting antenna</i>	<i>Remarks</i>
1	2	3	4	5	6	7
LOC 21 ILS CAT I (5°E/2019)	BN	109.700 MHz	H24	315938.47N 0345304.79E	131 FT	
GP/DME 21 (5°E/2019)	Dots/Dashes	333.200 MHz	H24	320058.78N 0345351.37E	126 FT	CH 34 X
DVOR/DME (5°E/2019)	BGN	113.500 MHz	H24	320047.2N 0345231.3E	100 FT	CH 82 X
LOC 12 ILS CAT I (5°E/2019)	BG	110.300 MHz	H24	315954.86N 0345348.76E	132 FT	
GP/DME 12 (5°E/2019)	Dots/Dashes	335.000 MHz	H24	320042.51N 0345208.37E	141 FT	CH 40 X
LOC 26 ILS CAT I (5°E/2019)	BA	108.700 MHz	H24	320042.1N 0345111.7E		
GP/DME 26 (5°E/2019)	Dots/Dashes	330.500 MHz	H24	320105.1N 0345321.1E	162 FT	CH 24 X
LOC 08 ILS CAT I (5°E/2019)	BC	110.900 MHz	H24	320108.6N 0345405.2E	134 FT	
GP/DME 08 (5°E/2019)	Dots/Dashes	330.800 MHz	H24	320044.7N 0345151.1E	131 FT	CH 46 X
LOC 30 ILS CAT I (5°E/2019)	BD	111.900 MHz	H24	320056.39N 0345150.41E	100 FT	
GP/DME 30 (5°E/2019)	Dots/Dashes	331.100 MHz	H24	320008.4N 0345331.5E	171 FT	CH 56 X

LLBG AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

All traffic ARR/DEP must have a fully coordinated slot. Applications must be applied for 48 HRS in advance (MON-THU) and 72 HRS in advance on FRI-SUN, to MAIL: tlvacxh@iaa.gov.il.

At Tel-Aviv/Ben-Gurion Airport a number of local regulations apply. The regulations are collected in a manual, which is available at the AIS briefing office at the Ben-Gurion Airport Operations Center at the terminal building. This manual includes, among other subjects, the following:

- a) the meaning of markings and signs;
- b) information about aircraft stands;
- c) information about taxiing from aircraft stands including taxi clearance;
- d) limitations in the operation of large aircraft including limitations in the use of aircraft's own power for taxiing;
- e) helicopter operations;
- f) marshaller assistance and towing assistance;
- g) use of engine power exceeding idle power;
- h) engine start-up and use of APU;
- i) fuel spillage;
- j) precautions during extreme weather conditions.

Marshaller assistance can be requested.

Local regulations may be requested in writing from Tel-Aviv/Ben-Gurion administration.

In order to expedite traffic, unless otherwise advised by ATC, pilots are requested to vacate runways after landing as follows:

26/08 via High Speed Exit W4/W3 respectively.

30 via high speed Z into K,

12 via high speed Y into M,

RWY 21: To terminal 3 via high speed E3 into M

To aprons (serving terminal 1): J, L, BE, via high speed T3 into K. If unable, pilot shall notify ATC.

Pilots are requested to vacate the runway without delay.

Towing of aircraft

Aircraft being towed from terminal 1 to terminal 3 and vice-versa must establish and maintain communication with

ground control (see LLBG AD 2.18): from terminal 1 to terminal 3: GND EAST, from terminal 3 to terminal 1: GND WEST.

When GND EAST and GND WEST are combined the frequency to be used shall be 118.05 MHz.

2. Taxiing to and from stands

General:

- Aircraft shall cross active runway on TOWER frequency.
- Do not cross runway without specific authorization.

Arriving aircraft:

- will be allocated an apron and a stand number by the TWR.
- will be guided by the "Follow Me" vehicle and guided by the marshaller on the stand, except for apron H and concourses B, C, D and E of terminal 3.
- Guidance for parking stands of concourses B, C, D, E and H will be by Advanced Visual Docking Guidance System (AVDGS). In order to enable the AVDGS systems early identification of aircraft and avoid misidentification, aircraft taxiing into the stand shall do so accurately on the C/L before during and after final turn into the stand. Taxi & landing lights should be turned off when not required due to possible AVDGS blinding.

In case of AVDGS malfunctioning, aircraft shall stop immediately and notify the TWR. In such cases, aircraft shall be towed into the stands, unless otherwise instructed by the TWR. Whenever C-6 or D-6 are occupied, aircraft assigned parking stands C-5 or D-5 (respectively) shall be towed into stands.

- Aircraft entry to apron V1 (stands V6-V9) - by follow-me instructions only.

Transponder operation:

Arriving aircraft- after landing continue transmitting Mode A Code and Mode S until ACFT is parked on stand. Aircraft operating Mode S shall identify using ICAO call-sign.


Pilots shall be guided into apron H and into the gate on all concourses of terminal 3 by means of an AVDGS, depicted as follows:

FMT APIS (Aircraft Parking and Information System).

Azimuth and stop guidance are provided on a display unit mounted in the extension of the center line.

Intercept the center line and follow the azimuth guidance display.

Check that correct aircraft type/series is shown on the APIS display unit.

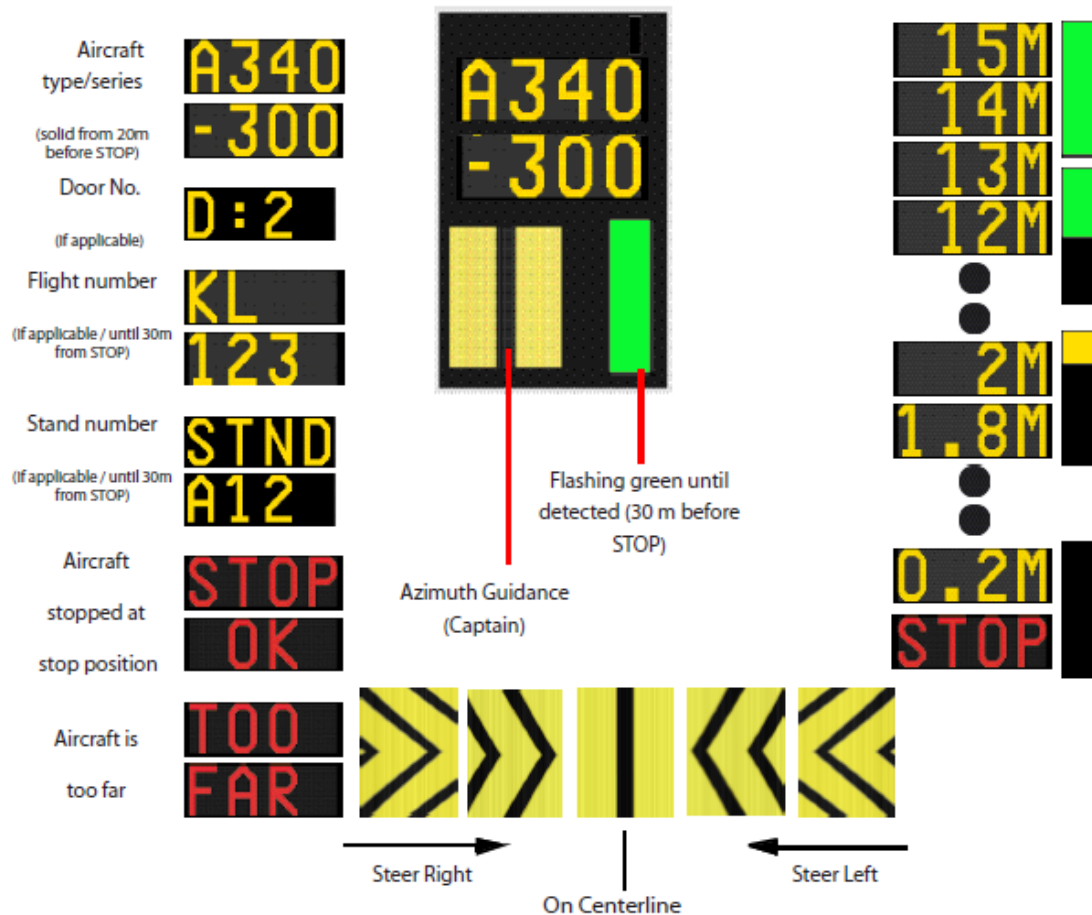

CAUTION

ABORT DOCKING IF THE DISPLAY SHOWS ANY OF THE FOLLOWING INFORMATION
STOP

WRONG AIRCRAFT TYPE/SERIES

IF THE AZIMUTH GUIDANCE IS DEACTIVATED

Departing aircraft:

- 'Clearance prior to taxi' (CPT) is provided continuously via datalink (DCL) or by voice (Frequency published by ATIS).
Pilots shall contact CPT 15 minutes before start-up.
Voice MSG - shall specify the following: ACFT callsign and type, stand number, ATIS letter and the intended start-up time.
DCL – Successful clearance must be accepted within 5 MIN. after receipt or a "Revert to voice" MSG will be received.
- In order to adhere to SLOT times, aircraft will be cleared to pushback and taxi, not later than 10 minutes prior to calculated take off time (CTOT)
- When aircraft is ready for departure, the crew shall request and obtain 'push-back' clearance and taxi instructions on GND frequencies. From all parking positions, including aprons V, BE, J, L and H pushback is approved only with specific ATC clearance. Aircraft receiving 'push-back' clearance is expected to vacate the gate within 2 minutes of the pushback clearance.
- Apron BE, J, L and H start-up procedure: aircraft shall start-up all engines while pushing back to the assigned start-up position.
- Apron V1+2 start-up procedure: Traffic will be pushed back to the assigned start-up position and will start engines as instructed by ATC.
- Aprons B, C, D and E of terminal 3 (Ground West): Engine start-up while aircraft is connected to the gate is prohibited.
- Pilots are requested to start engines during push-back
- Cross bleed start-up approved only at the release point.
- pilots cleared to line-up shall be ready for immediate take-off; if unable, notify ATC in advance.
- transponder Operation:
departing aircraft shall operate transponder on MODE A/ALT code and MODE S code, when ready for push-back or taxi clearance, whichever earliest.
Aircraft operating Mode S shall identify using ICAO call sign.

**3. Parking area for small aircraft
(General aviation)**

General aviation aircraft shall be guided by the "Follow Me" vehicle to the appropriate parking area for small aircraft. Aircraft wishing to stay beyond 36 hours should submit request to the Ben-Gurion Airport Operations Center. Parking beyond 72hrs for aircraft whose home base is not LLBG is prohibited. The above excludes state aircraft, hospital flights and flights approved by the Airport administration.

4. Parking area for helicopters

Parking is permitted as instructed by ATC.

**5. Apron – taxiing during
low visibility**

Taxiways in the apron area are not equipped with center line lights. The taxi guide lines may not be visible due to low vis-

ibility. Assistance from the "Follow Me" vehicle for departing aircraft may be requested via the GND.

6. Taxiing – limitations

NIL

**7. School and training flights –
technical test flights – use of runways**

- 7.1 Training flights must only be performed after prior coordination/permission from Ben Gurion Air Traffic Control. Only Instrument training will be approved.
 - a) As part of a weekly plan:
 - 1. A weekly plan starts on a Sunday.
 - 2. A request for a training slot should be submitted directly to the Ben Gurion ATC Manager not later than Thursday, for flights on the following week. Request shall be submitted by the pilot or his/her designated representative.
 - 3. Mail for a training slot – BGTRAIN@IAA.GOV.IL
 - 4. Tel. for a training slot – 03-9758641
 - 5. On the day of the flight the pilot will submit a standard flight plan.
 - b) Not as a part of a weekly plan:
 - 1. A pilot requesting to perform a training flight shall contact the ATC Supervisor, prior to the flight.
 - 2. The ATC Supervisor will approve the training flight based on traffic and the weekly plan.
- 7.2 The following restrictions apply:
 - a. Training flights are permitted daily between 07:00-23:00, local time, except on Friday night/Holiday Eve until 22:00.
 - b. Training flights will be approved subject to higher priority operations i.e commercial flights.
 - c. Training flights by Ultra- light aircraft & propeller driven parachutes are not permitted.
 - d. VFR circuit, as part of the Instrument training, is permitted.
- 7.3 AIS office/"Briefing" will approve a training flight-plan only after confirming that the flight is authorized by the chief of Ben-Gurion ATC/ATC Supervisor.
- 7.4 Authorization of a training flight is not an authorization for a parking position which has to be coordinated separately with Ben-Gurion Airport Operations Center.

8. Helicopter traffic – limitation

Non-scheduled public air traffic with helicopters is permitted only after applying to the Ministry of Transport, Civil Aviation Authority, International Relations Department (non-scheduled flights section) for authorization of such flight, and after prior approval from the Ben-Gurion Aerodrome Administration. The application must be submitted to the above department at least 30 days prior to the planned date of flight, or the first flight in a series, where applicable. Non-scheduled public air traffic with helicopter is permitted only after prior approval from Ben-Gurion Aerodrome Administration.

Any contact concerning the above shall be made via the handling company or directly to the office during the hours of service. If possible, not later than the day before the flight is to be carried out.

Any request for approval of traffic shall contain the following information:

- a) Owner/operator
- b) Type of helicopter, registration/call sign
- c) Date, arrival time/departure time, destination(s).

Furthermore, other details relevant to the evaluation of the request must be given as required.

Non-scheduled flights shall be conducted as per the "Licensing of Aviation Service" (charter flights) regulations 1982.

Copies of which may be obtained from the CAA's International Relations Department.

9. Removal of disabled aircraft from runways

Any aircraft involved in an accident shall be removed from the accident site only after obtaining permission of the chief investigator of aircraft accidents/incidents, or from the head of the investigation committee.

When an aircraft is wrecked on a runway, it is the duty of the owner or user of such aircraft to have it removed as soon as possible. If the owner or user does not remove a wrecked aircraft from the runway as quickly as possible, the aircraft will be removed by the aerodrome authority at the owner's or user's expense.

10. Airport Limitations (All times are local times)

10.1. Due to traffic congestion, operation of non-turbine general aviation, test and helicopter flights are not permitted at the airport during the following periods (except traffic approved by airport administration):

Summer: Sunday-Friday: 05:00-08:00, 14:00-18:00 & 00:01-01:40.

Winter: Sunday-Friday: 05:30-08:00, & 00:01-01:40. (Definition of winter \ summer according to IATA definitions).

10.2. Due to operational limitations landing of 4 engines aircraft is prohibited during the following periods (except traffic approved by airport administration):

Sunday-Friday: 08:00-17:00.

10.3. YOM KIPPUR - Day of Atonement (See GEN 2.1) - Airport closed as follows:

YOM KIPPUR's eve: Last ARR./DEP. At 14:00,

YOM KIPPUR: First ARR. 22:30 local time. First DEP. 23:30 local time

10.4. Airport closed for landings, daily 0100-0200.

Flights arriving from LCCC FIR shall not cross SOLIN before 0140.

10.5. Work In Progress – Unless otherwise published by NOTAM. The following Runways are closed between 08:30-13:30:

Runway 12-30: On Mondays,

Runway 21-03: On Tuesdays,

Runway 26-08: On Wednesdays.

LLBG AD 2.21 NOISE ABATEMENT PROCEDURES

Every operator of ACFT arriving and departing LLBG shall ensure at all times that ACFT is operated in a manner calculated to cause the least disturbance practicable in areas surrounding the APT. The published procedures may at any time be departed from to the extent necessary for avoiding immediate danger or for complying with ATC instructions.

1. Departures

Jet aircraft irrespective of weight, shall commence the following Noise Abatement Climb (NADP-1).

This procedure involves a power or thrust reduction at or above the prescribed minimum altitude and the delay of flap/slat retraction until the prescribed maximum altitude is attained. At the prescribed maximum altitude, the aircraft is accelerated and the flaps/slats are retracted on schedule while maintaining a positive rate of climb, to complete the transition to normal en-route climb speed. The initial climbing speed to the noise abatement initiation point is not less than V_2 plus 10 kt:

Take-off to power reduction height (not lower than 950ft QNH) –

Take-off-power Take-off flaps, climb at $V_2 + 10$ kt (or as limited by body angle)

At power reduction height (not lower than 950ft QNH) –

Reduce thrust to not less than climb power

Power reduction height to 3150ft (QNH) –

Climb at $V_2 + 10$ kt (or as limited by body angle)

At 3150 (QNH) or at 3000ft (QNH), if restricted by ATC - Normal acceleration and en-route climb configuration.

2. Night Flight Restrictions

- a) No restrictions imposed on
 - aircraft rendering medical assistance,
 - firefighting aircraft,
 - cloud seeding flights,
 - Other exceptional circumstances by prior permission from the CAAI.
- b) Runway 30 is not available for take-off between 23:00-06:00 local time, unless approved, in exceptional circumstances, by airport manager.
- c) Other runways: aircraft shall not take-off between 01:40-05:30 local time during winter and 01:40-05:00 local time during summer, (definition of winter \ summer according to IATA definitions).
- d) Despite Para. c) take-off between 01:40-02:00 local time shall be approved, only in exceptional circumstances, by airport manager,
- e) Take-off between 05:30-06:00 local time during winter season, and 05:00-06:00 local time during summer season, shall be approved in one of the following conditions:

- 1) The noise level for all departing aircraft will not exceed a "Reduced Noise Level" as recorded by the Noise monitoring terminals (NMT).

"Reduced Noise Level", for this matter, is a noise level that will not exceed the maximum noise level, in dB(A), MINUS 3 dB(A), approved for departures of aircraft with maximum take-off mass of LESS than 300 tones. (Refer to the table "Noise monitoring terminals (NMT)" in this paragraph).

- 2) Flights, scheduled to depart before the night take-off restriction, and were delayed, may be approved by the airport manager, without the restriction in sub-para. 1).

3. Noise monitoring system

A noise monitoring system is operating at Tel-Aviv/Ben-Gurion airport. In conjunction with the system, the following procedures have been designed to avoid excessive aircraft noise in the area adjacent to the airport, and the areas over-flown during take-off and landing.

The Standard Instrument Departure routes as shown on the Tel-Aviv/Ben-Gurion SID procedures charts have been de-

signed so as to minimize the noise levels over the densely populated areas in the airport's vicinity.

4. Arrivals

CDA – On receipt of descent clearance, descent at the rate best suited to a continuous descent so as to join the GS (or final segment) at the appropriate height for the distance without recourse to level flight.

The descent shall be arranged so as to maintain ENR configuration for as long as possible considering safety and ATC requirements. Speed reduction and extension of landing gear and high lift devices are to be planned in such a way, that landing configuration is established and correct approach speed is reached shortly prior to or at 4 miles final.

5. Reverse thrust

Reverse thrust, other than idle thrust, shall not be used between 23:00-06:00LT, except for safety reasons.

6. Maintenance Run-ups

Run-ups for maintenance purposes are not permitted between 23:00-05:00LT.

7. Noise monitoring terminals (NMT)

The following NMT are operating as part of the Noise Monitoring System:

NMT No.	Location (coordinates)	Location (geographical)	Max. noise levels in db (A)	
			For departures of a/c with maximum take-off mass of 300 tones or above	All other departures
1	315930N 0345629E	SHOHAM	90	82
2	320146N 0345101E	OR-YEHUDA	93	91
3	320032N 0344945E	MISHMAR-HA'SHIV'AH	93	91
4	320001N 0344947E	BEYT-DAGAN	93	91
5	320022N 0344753E	KIRYAT-SHARET	88	85
6	315920N 0344725E	RISHON-LETZION	88	85
7	315953N 0344617E	KIRYAT BEN-GURION	88	85
8	315952N 0344426E	NEVE-HOF	88	85
9	320044N 0344742E	ESHKOL	88	85
10	320008N 0345123E	ZAFARIA	93	91
11	320015N 0344513E	BAT-YAM	88	85
12	315815N 0344932E	TNUOT	88	85

LLBG AD 2.22 FLIGHT PROCEDURES

1. General

Flights within Ben-Gurion TMA and CTR shall be in accordance with the Instrument Flight Rules and with Controlled Visual Flight Rules.

2. Preferential runway system*Arrivals*

- 1) Runway 12 is the preferred runway assigned for landing aircraft, provided the tailwind component does not exceed 10 kt when runway is dry or 5 kt when runway is wet.
- 2) During the following hours (local time) Runway 30 is the preferred runway assigned for landing, using the RNP approach:
Between 23:00 – 01:00 (summer and winter) & 05:30 – 07:00 (winter season) or 05:00-07:00 (summer season).
Seasons are according to IATA definitions.

Departures

Runway 26 is the preferred runway assigned to departing aircraft, provided the tailwind component does not exceed 5 KT.

3. Preferential Departure Routes*Departure westbound*

PURLA – L53 – SUVAS – U/L53 – KAROL

Departure North-Westbound

PURLA – P52 – GITLA – U/W13A – VELOX

Departure to Amman FIR

SALAM

Departure Southbound

TOMAL – J10

4. Procedures for IFR flights within Ben-Gurion TMA

The inbound, transit and outbound routes shown on the charts may be varied at the discretion of ATS if necessary, in case of congestion. Inbound aircraft may also be instructed to hold one of the designated airways, reporting points.

5. Radar procedures within Ben-Gurion TMA

On initial contact with Approach/Departure control, pilots shall report the following:

Departing aircraft: current altitude.

Arriving aircraft: current altitude and ATIS letter received.

Radar vectoring and sequencing

Radar vectors and altitudes will be issued, as required, for spacing and separating, for separation and circumnavigation of weather.

Visual approach

Radar vectoring to instrument or visual approach will be issued in accordance to the SMAC (Surveillance Minimum Altitude Chart).

In case of missed approach, pilots shall follow ATC instructions.

Precision radar approach

Nil

Communication Failure

1. Set the transponder to Code 7600;
2. Keep Transmitting ("Blind Transmission") on tower/approach Frequency - or on 121.5 MHz;
3. If Able, Contact tower by Telephone (+972-3-9758110/666) and inform tower about your intentions;

Procedures for IFR Flights

4. **Arriving aircraft**
 - a) If the arrival STAR or approach clearance already received:
 - 1) Proceed and complete the approach accordingly;
 - 2) Land after receiving green light from the tower;
 - 3) In case of red light received from the tower, or flashing runway edge lights, perform a missed approach procedure.
 - 4) Unless a specific "COMMUNICATION FAILURE" procedure is prescribed on the chart, perform the missed approach procedure, then proceed to the IAF at the IAF altitude, and perform the same approach again.
 - b) If arrival STAR or approach clearance were not received:
 - 1) Join star "GEFEN 1C".
 - 2) Perform ILS X approach for runway 26.
 - 3) Land after receiving green light from the tower;
 - 4) In case of red light received from the tower, or flashing runway edge lights, perform a missed approach procedure.
 - 5) Unless a specific "COMMUNICATION FAILURE" procedure is prescribed on the chart, perform the missed approach procedure, then proceed to the IAF at the IAF altitude, and perform the same approach again.
5. **Departing Aircraft**
 - a) If returning to land: Proceed to "ORLEV" then turn to "DIVLA" at 5,000 feet, Join star "GEFEN 1C" and Perform ILS X approach for runway 26.
 - b) If not returning to land:
 - 1) Unless specified differently on a specific SID Chart: Follow the SID with all applicable restrictions and thereafter adjust level and speed in accordance with the filed flight plan.
 - 2) Traffic departing via "SALAM" maintain 7,000 feet to "SALAM", Traffic departing via "SIVAK" maintain 9,000 feet to "SIVAK".

Procedures for CVFR Flights

- a) Fly over the tower and determine the Runway in Use, observing the traffic pattern and/or the wind direction indicator ("windsock").
- b) Traffic pattern:
 - Runways: 30, 26 and 21 – standard pattern,
 - Runways: 12 and 08 – non-standard pattern.
- c) Join the down-wind leg at 2000 feet, considering the traffic in the vicinity of the aerodrome.
- d) Land after receiving green light from the tower.

- e) In case of red light received from the tower, or flashing runway edge lights, join the down-wind leg again.

6. Procedures for CVFR flights within Ben-Gurion CTR and TMA

- a) Circuit altitude
 - Category A and B – 1500' feet,
 - Category C and D – 2000' feet.
- b) Traffic pattern
 - Runways: 30, 26 and 21 – standard pattern (Unless instructed by ATC),
 - Runways: 12 and 08 – Non-standard pattern (Unless instructed by ATC).
- c) CVFR flights are conducted according to controlled visual routes chart (See Domestic AIP, chapter B-03).
Note – ATC clearance is intended to provide traffic information.

7. Procedure for IFR flights to and from Amman (Jordan)

Departure procedures

- a) As soon as practicable, but not later than 10 NM west of SALAM, the pilot shall contact Amman TACC on the second radio set.

Arrival procedures

- a) Flight plan shall be filed for the flight concerned.
- b) Flight movement messages shall be addressed as stated in ENR 1.11-1.
- c) As soon as practicable, but not later than 10 NM East of SALAM, two way radio communication shall be established on Tel-Aviv ACC freq. (121.4 MHz) for preliminary identification.
The flight shall not be permitted to enter Tel-Aviv FIR in the event of communication failure.
- d) The aircraft shall maintain 8 000 FT before entering FIR, 5 NM east of SALAM.
- e) The pilot shall contact Ben-Gurion TMA, freq. 119.50 MHz, not later than SALAM.

8. Low Visibility Procedure (LVP)

- a) General
 1. Low Visibility Procedure (LVP) will be implemented by TWR, and transmitted by ATIS, when RVR is below 800 meters (or visibility below 1200 meters).
 2. Preferential Runway Configuration: RWY 21 will be used for landings and RWY 26 for Takeoffs.
 3. Follow-me service may be provided to aircraft, to and from stands, upon pilot request or by ATC. This service however will not be provided when visibility is less than 100 meters;
 4. During emergency in Low Visibility Conditions, RWY 26 will be the preferred runway for landing.
 5. Due to greater separation applied in Low Visibility conditions, expect delays in the approach and takeoff sequence.

- b) Pilots Reports
 1. Aircraft lifting off shall report "airborne" when clear of ground;

9. Take off from runway/taxiway intersections

Aircraft may depart from runway intersections, by TOWER approval. Ref. Remaining distances as specified in table LLBG AD 2.13A.

10. Take off Minima for IFR Departures – ALL RUNWAYS

	HIRL, CL & RVR (minimum 2 transmission meters req.)	RCLM (DAY only) or CL & Rwy END lights or HIRL
A, B, C, D	350 m	400 m

**LLBG AD 2.23 ADDITIONAL INFORMATION
Bird concentration in the vicinity of the airport
See AD 2.5–49 and 2.5–50**

LLBG AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome Chart – ICAO	AD 2.5–13/O
Aircraft Parking Docking Chart - ICAO - Terminals 1	AD 2.5–15/O
Aircraft Parking Docking Chart - ICAO – Apron V.....	AD 2.5–15A/O
Aircraft Parking Chart - ICAO - Terminal 3.....	AD 2.5–16/O
INS coordinates for parking stands - (GND West).....	AD 2.5–16A
Aircraft Parking Chart - ICAO - Terminal 3 – Apron A.....	AD 2.5–17/O
Aerodrome Obstacle chart -Type A - ICAO - RWY 03/21.....	AD 2.5-18
Aerodrome Obstacle chart -Type A - ICAO - RWY 08/26.....	AD 2.5-18A
Aerodrome Obstacle chart -Type A -ICAO - RWY 12/30.....	AD 2.5-18B
Precision Approach Terrain Chart - ICAO - RWY 12	AD 2.5–19
Standard arrival chart instrument (STAR) - ICAO - RWY 08 SOLIN 3A, 3B	AD 2.5-21/O
Standard arrival chart instrument (STAR) - ICAO - RWY 12, 30 DEMOV 1A, 1B	AD 2.5-23/O
Standard arrival chart instrument (STAR) - ICAO - RWY 12 TOMAL 2B, SALAM 2B	AD 2.5-23A/O
Standard arrival chart instrument (STAR) - ICAO - RWY 21 GEFEN 1A, 1B, TOMAL 2A, SALAM 2A.....	AD 2.5-24/O
Standard departure instrument (STAR) - Tabular Description RWY 21 GEFEN 1A, 1B, TOMAL 2A, SALAM 2A	AD 2.5-24A/O
Standard arrival chart instrument (STAR) - ICAO - RWY 26 GEFEN 1C, 1D, TOMAL 2C, SALAM 2C.....	AD 2.5-25/O
Standard departure instrument (STAR) - Tabular Description RWY 26 GEFEN 1C, 1D, TOMAL 2C, SALAM 2C.....	AD 2.5-25A/O
Standard arrival chart instrument (STAR) - ICAO - RWY 30 GEFEN 1E, 1F, TOMAL 1E, SALAM 1E	AD 2.5-26/O
Standard departure instrument (STAR) - Tabular Description RWY 30 GEFEN 1E, 1F, TOMAL 1E, SALAM 1E.....	AD 2.5-26A/O
Standard arrival chart instrument (STAR) - ICAO - RWY 30 GEFEN 1G, 1H, TOMAL 1G, SALAM 1G	AD 2.5-27/O
Standard departure instrument (STAR) - Tabular Description RWY 30 GEFEN 1G, 1H, TOMAL 1G, SALAM 1G	AD 2.5-27A/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 12, 26, 30 ORLEV 1C, 1E, 1F	AD 2.5–28/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 12, 26, 30 PIDET 1C, 1E, 1F, RIPUD 1E, 1F	AD 2.5–29/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 08 MERVA 1B, GITLA 1B, SUVAS 1B, SALAM 4B, TOMAL 4B.....	AD 2.5–30/O
Standard departure instrument (SID) - Tabular Description RWY 08 MERVA 1B, GITLA 1B, SUVAS 1B, SALAM 4B, TOMAL 4B	AD 2.5–30A/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 12 MERVA 1C, GITLA 1C, SUVAS 1C, SALAM 4C, TOMAL 4C.....	AD 2.5–31/O
Standard departure instrument (SID) procedure Tabular Description RWY 12 MERVA 1C, GITLA 1C, SUVAS 1C, SALAM 4C, TOMAL 4C	AD 2.5–31A/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 26 MERVA 1E, GITLA 1E, SUVAS 1E, SALAM 4E, TOMAL 4E.....	AD 2.5–32/O
Standard departure instrument (SID) procedure Tabular Description RWY 26 MERVA 1E, GITLA 1E, SUVAS 1E, SALAM 4E, TOMAL 4E.....	AD 2.5–32A/O
Standard Departure Chart – instrument (SID) - ICAO - RWY 30 MERVA 1F, GITLA 1F, SUVAS 1F, SALAM 4F, TOMAL 4F.....	AD 2.5–33/O
Standard departure instrument (SID) procedure Tabular Description RWY 30 MERVA 1F, GITLA 1F, SUVAS 1F, SALAM 4F, TOMAL 4F.....	AD 2.5–33A/O
Standard Departure Chart – instrument (SID) -ICAO - RWY's 03, 08, 12, 21 NAT 1A, 1B, 1D, PURLA 2G.....	AD 2.5–34/O
Instrument Approach Chart – ICAO - ILS RWY 12	AD 2.5–39/O
Instrument Approach Chart – ICAO - RNP RWY 12	AD 2.5–39A/O
Instrument Approach Chart – ICAO - ILS RWY 08.....	AD 2.5–40C/O

Instrument Approach Chart – ICAO - ILS RWY 30.....	AD 2.5-41/O
Instrument Approach Chart – ICAO - ILS X RWY 26.....	AD 2.5-43A/O
Instrument Approach Chart – ICAO - ILS RWY 21.....	AD 2.5-44/O
Instrument Approach Chart – ICAO - LOC RWY 21.....	AD 2.5-44A/O
Instrument Approach Chart – RNP Y RWY 30 (AR).....	AD 2.5-45/O
Visual Approach Chart – NAMIM APCH RWY 21.....	AD 2.5-46/O
Visual Approach Chart – GAVRI APCH RWY 30.....	AD 2.5-46A/O
Visual Approach Chart – DONAG APCH RWY 30.....	AD 2.5-46B/O
Instrument Approach Chart – ICAO – RNP Z RWY 30.....	AD 2.5-46C/O
Instrument Approach Chart – ICAO - RNP RWY 08.....	AD 2.5-46D/O
Instrument Approach Chart – ICAO - RNP RWY 26.....	AD 2.5-46E/O
Instrument Approach Chart – ICAO - RNP X RWY 30.....	AD 2.5-46F/O
Instrument Approach Chart – ICAO - RNP X RWY 21.....	AD 2.5-46G/O
Instrument Approach Chart – ICAO - RNP Y RWY 21.....	AD 2.5-46H/O
Visual Approach Chart.....	AD 2.5-47
ATC Surveillance Minimum Altitude Chart – ICAO.....	AD 2.5-48/O
Bird concentrations and movements.....	AD 2.5-49
Bird concentrations and movements – (all year).....	AD 2.5-50